


D2 Series

Tubular Deadbolt Lock



**2" ADA Approved Thumb Turn
with 3/32" Steel Mounting Plate**

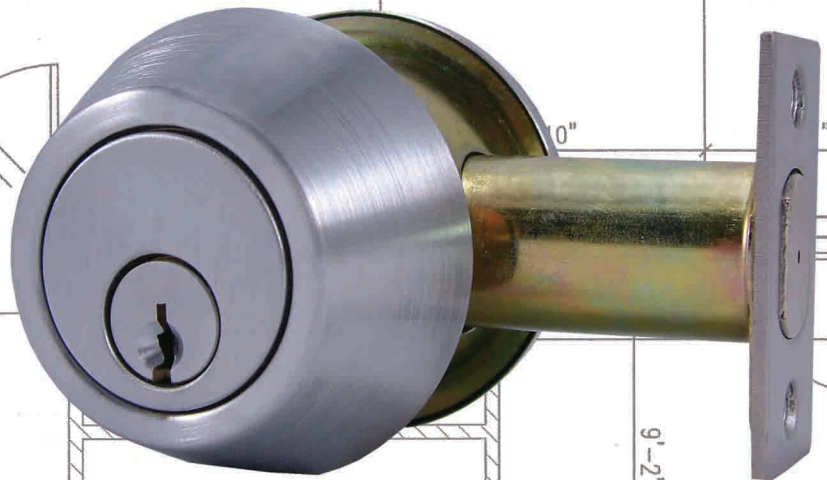

Specifications

- ANSI :** Meets & Exceeds ANSI - A156.2, Grade 2 Standards
- UL Listings :** UL Listed for "A" Label 3 Hour Fire Doors
- ADA Compliance :** 2" ADA Thumbturn Meets ADA & ANSI A117.1 accessibility codes
- Lock Chassis :** Steel, Zinc dichromated for Corrosion Resistance
- Trim :** Free spinning cylinder collar resists wrenching and prying
- Handing :** Non-Handed - Completely reversible
- Backset & Latchface :** 2 3/4" fixed backset std. with 1 1/8" x 2 1/4" latchface, 2 3/8" backset available with 1" x 2 1/4" latchface both with self adjusting front for square or beveled doors
- Latchbolt :** Grade 1 Solid Brass with 1" Throw & Anti-Saw Hardened Steel Pin Insert
- Cylinder Options :** 6 Pin Brass, C Kwy, with 2 Keys std, Prepared for Small format IC core (less core)
- Optional Keyways :** 11 popular competitor keyways available with replacement cylinders
- Strike :** 1 1/8" x 2 3/4" Square corner
- Door Preparation :** ANSI A115.2 - 2 1/8" crossbore
- Door Thickness :** 1 3/8" to 2" thick doors
- Standard Finishes :** US3 PVD*, US4, US10B, US15, US26 PVD*, US26D (PVD = Lifetime Finish)
- Fasteners :** Combination screws for wood or metal doors & frames
- Warranty :** Limited Lifetime Warranty



Standard Cylinder



D2-S Single Cylinder

D2-D Double Cylinder

Prepared for IC Core



D2-S-IC Single Cylinder

D2-D-IC Double Cylinder

Non Keyed



D2-TBP Thumbturn x Blank Plate



211 Endeavor Drive - PO Box 680
Rogersville, MO 65742
PH 877-258-1262 FX 877-888-0150
www.designhardware.net