

The TA-5111 Series maglock provides exceptional security and ease of installation. With its simple to install quick mounting bracket and convenient wiring access panel the TA-5111 will provide years of protection for the most demanding openings.

Each maglock includes with built-in voltage spike suppression, lock status, LED, timer and door status switch.




Standard Single Maglock – TA-5111-5TD

Standard Double Door Maglock – TA-5121-5TD

Specifications:

Dimensions:

Single Magnet	- 266mm(L) x 73mm(H) x 40mm(D)
Double Magnet	- 532mm(L) x 73mm(H) x 40mm(D)
Armature	- 185mm(L) x 61mm(W) x 16mm(T)
Voltage	- 12VDC or 24VDC Selectable
Current Draw	- 500mA @ 12VDC
(Each Door)	- 250mA @ 24VDC
Spike Suppression	- Built-in
Holding Force/Door-	1200 LBS
Lock Status Sensor	- Standard
LED	- Standard
Timer	- Standard
Door Status	- Standard
Listings	- cUL, UL

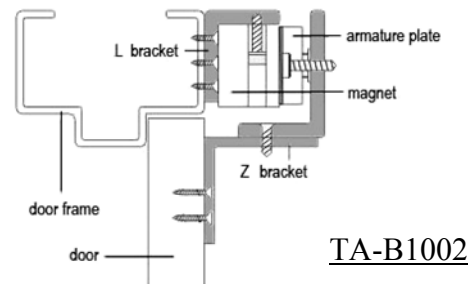

Mounting:

- Surface Mount, Push Side
- Quick Mounting Bracket Included
- Optional L & Z Bracket for pull side mounting (Part # TA-B1002)
- Optional 1/2" glass door bracket (Part # TA-U185)

