

# EasyKit®

## ACDx10xE5000 ACDx20/21xE5000 Access Controlled Doors

The ACDxE5000 EasyKit offers industry-proven life safety and security hardware for high-use, high-abuse doors with a cost-effective access control solution.



### Benefits

- Cost-effective access control with panic hardware in one easy-to-install kit
- No key or cards to manage
- Audit trail provides additional security management
- Optional easy-to-use Excel-based software
- Pin code can be changed in seconds
- Easy-to-replace standard AA batteries
- Tough and durable design for years of trouble-free service in high-use, high-abuse environments
- Minimal door prep with no through-door wiring saves time and money

### Features

- E5000 features cast stainless steel internal drive parts
- Stainless steel deadlocking Pullman-type latch bolt on exit device
- Weatherproof trim requires no outside gasket
- Non-handed
- Field sizeable panic device
- E5000 offers up to 100 access codes
- 1/8 turn dogging
- Heavy-duty angled end cap deflects damage away from panic device
- Battery pack included

For more information on 10/20/21 exit devices, see individual catalog pages

For more information on E5000 visit [www.kaba-ilco.com/access\\_control](http://www.kaba-ilco.com/access_control)

### Mechanical Options

- CD - Cylinder Dogging
- HD - Hex Dogging (Std.)
- LD - Less Dogging
- 36 - Fits 36" door width (Std.)
- 48 - Fits 48" door width
- F - 3-Hour Fire Rated (both E5000 and panic device)
- H - Hurricane Rated
- 99 - surface strike (Std.)
- 98 - semi mortise strike

### Electrical Options

- Exit Alarm (EA)
- Electric Dogging (ED)
- Electric Integration (EI)
- Electric Latch Retraction (ER)
- Delayed Egress - Self Contained (EE)
- Delayed Egress with Latch Retraction (EEExER)
- Delayed Egress - Mag Lock (EM)
- Electric Switching (ES)
- Request to Exit (EX/EXV)
- Request to Exit Weatherized (EXxW)

Refer to Electrified Options section for more information

## Accessories

- SN1 - Sex Nut Fasteners
- SSK1 - Torx Security Screw Kit

## Technical Information

- Door Types - Wood, Hollow Metal, Fiberglass or Aluminum
- Door Thickness - Fits standard 1-3/4" - 2-1/4" (for other door thicknesses, contact factory)
- Door Stile - Fits minimum 5" wide stile with 99 strike (Std.)
- Machine and Sheet Metal Screws (Std.)
- Rail - Heavy Ribbed Aluminum Extrusion
- E5000 numeric pushbuttons - vandal resistant, 12 button, metal keys
- E5000 construction is solid cast housing and solid cast zinc levers


## Finishes (Kaba)

- 626/26D Satin Chrome
- 606/04 Lifetime Satin Brass
- 695/55 Duranodic
- 605/03 Lifetime Bright Brass



## Finishes (Advantex)

- 605 / US3 - Polished Brass
- 606 / US4 - Brushed Brass
- 611 / US9 - Polished Bronze
- 612 / US10 - Brushed Bronze
- 613 / US10B - Oil Rubbed Bronze
- 629 / US32 - Polished Stainless Steel
- 630 / US32D - Brushed Stainless Steel

## Riser Diagram

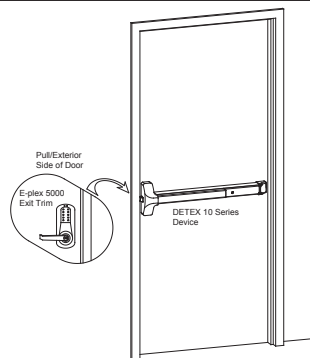

## Dimensions

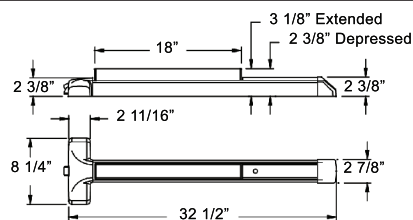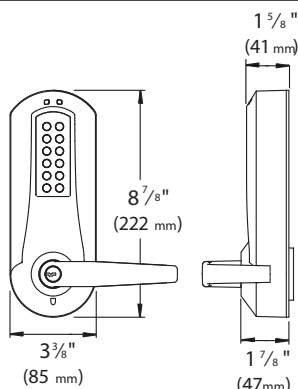

10 Series Dimensions Shown

## Detex Limited Warranty

Advantex - 10 Year Mechanical / 3 Year Electrical Manufacturers Limited Warranty

E5000 - 3 year Manufacturers Warranty

## Listings and Approvals Advantex



UL Listed  
Panic Hardware



UL Listed Fire Exit Hardware for 3 hours, maximum  
4'x10' single doors and pairs of 4'x8' with F90KR key removable Mullion



Meets ADA requirements



ULC 97, Standard 7-2 and UL10C for positive pressure



ANSI/BHMA certified A156.3



Meets NFPA 80 & 101 for Life Safety



Miami-Dade County, Florida } 10 Series  
NOA 10-0303.02 EXP. 04/07/15 } Only  
State of Florida Approval  
FL9052



California State Fire Marshall -  
4140-0127:105 and  
3725-0127:108

## Listings and Approvals E5000



3 Hour UL & ULC fire rating for "A" labeled doors



Meets ADA requirements



ANSI/BHMA A156.2-2001 Grade 1

*Where Trust is Built™*  
**DETEX®**  
*Integrated Door Security Systems*

Detex Corporation  
302 Detex Drive  
New Braunfels, Texas 78130-3045 USA  
PH. (830) 629-2900  
(800) 729-3839  
FAX (830) 620-6711  
(800) 653-3839  
<http://www.detex.com>  
USA Sales:  
[marketing@detex.com](mailto:marketing@detex.com)  
International Sales:  
[export@detex.com](mailto:export@detex.com)