


National  
Guard  
Products  
Inc.



1-800-  
647-7874

# L-700-RX, L-VRSG-2, L-VRSG-3 for 1-3/4" Door INSTALLATION INSTRUCTIONS

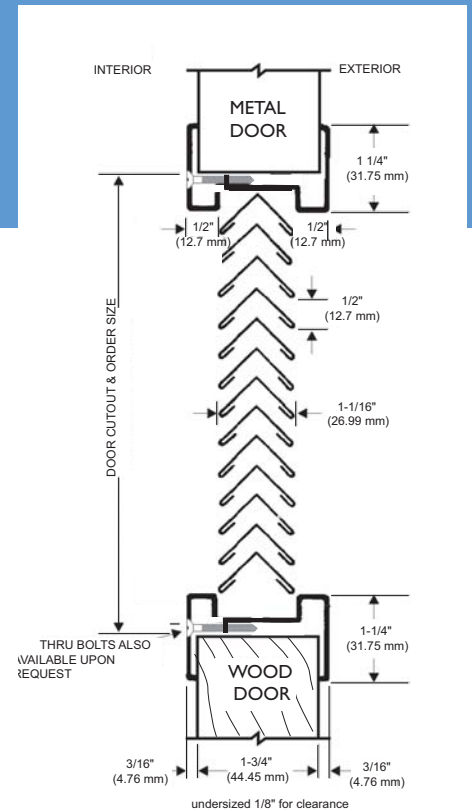

1. Cut out door in accordance with door manufacturers procedure.
2. Position outer frame with louver core, in door cut out.
3. Position inner frame and insert and start all screws before fully tightening.
4. Tighten screws using crisscross pattern. Use caution when using power screw driving equipment to avoid stripping the material.

**FIELD PAINTING: FOR BEST RESULTS SCUFF FINISH WITH A SCOTCH-BRITE PAD OR SAND PAPER BEFORE PAINTING.**

11/07